

CYLINDERS (AC: Aircraft Cable Mount) INSTALLATION INSTRUCTIONS

CAUTION: BEFORE CONNECTING THE FIXTURE TO A POWER SUPPLY, MAKE SURE THE POWER IS SWITCHED OFF.

GENERAL:

1. Fixture must be installed by licensed electrician.
2. All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code.
3. Before starting the installation, make sure all electricity has been turned off and electrical breaker has been locked out and tagged out.
4. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.

NOTE: The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur.



INSTALLATION INSTRUCTIONS:

- 1) Use Push Pin to set Aircraft Cable to approximate length and leave excess cable to trim later. **A**
- 2) Trim excess Power Cord and make all wiring connections at the J-Box following NEC and local electrical codes. **B**
- 3) Attach Cord Grip around Power Cord and push it up into center hole of Canopy. **C**
- 4) Loosen Set Screw in Canopy and twist or remove Mounting Plate from the back. **D**
- 5) Use J-Box Mounting Screws (by others) to fasten the Mounting Plate to the standard sized J-Box on the intended surface. Keep in mind the desired orientation of the fixture. Install the Mounting Plate to the J-Box about 120° rotated from the desired position. **E**
- 6) Align the tabs of the Canopy with the slots of the Mounting Plate. Rotate the Canopy along the slots of the Mounting Plate until it snaps to the end of the rotation (which is about 120°). Re-install the Set Screw into the Canopy to lock it into position. Tighten to ensure Canopy is level. **D**
- 7) Fine tune fixture level using Cable Adjustment Push Pins, then trim excess Aircraft Cable. **F**
- 8) Swivel Fitting allows Aircraft Cable to adjust to any sloped ceiling up to a 45° Angle. **G**
- 9) For Sloped Ceiling align Slots in Swivel Fitting with the direction of the slope. **H**
- 10) Restore power to circuit then test fixture.

NOTE: LED lampping is integral and NOT intended for general servicing.

IMPORTANT: All FC|SSL products can be cleaned with non-abrasive and chemical free agents. Use a soft cloth with mild detergent on exterior only.




DETAILED ILLUSTRATIONS

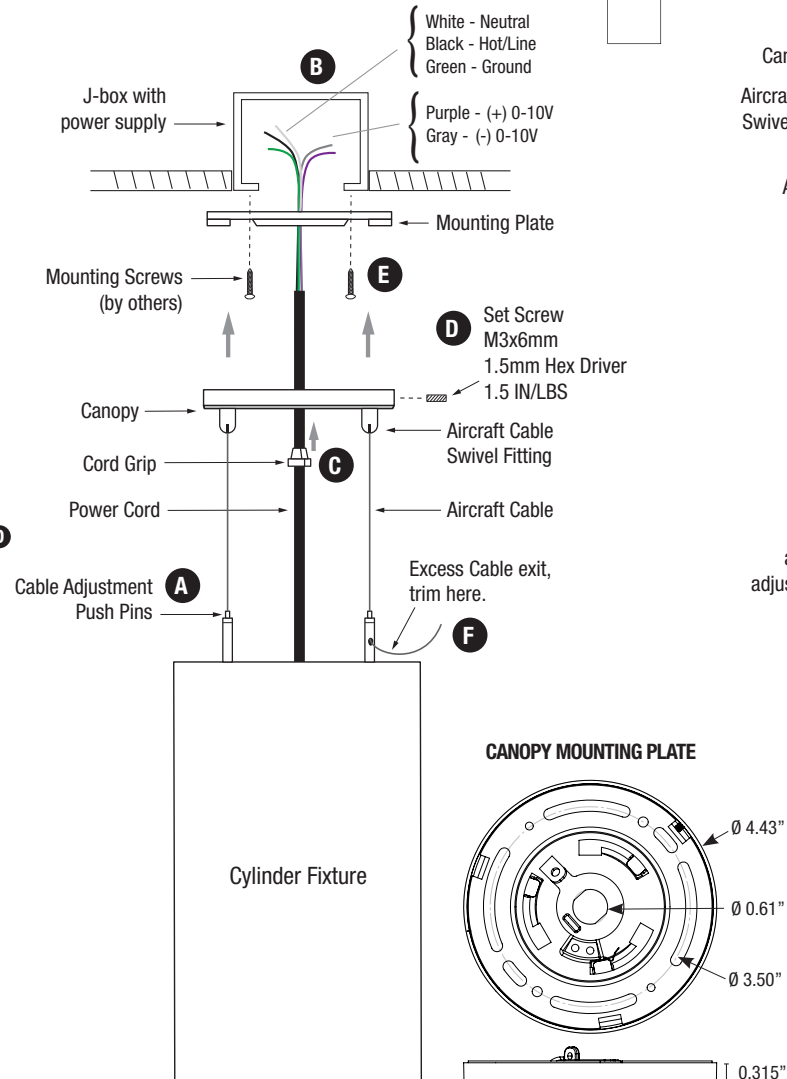

solid state luminaires

t 800.900.1730

3609 Swenson Ave. St. Charles, IL 60174

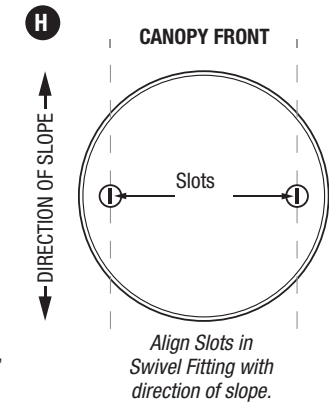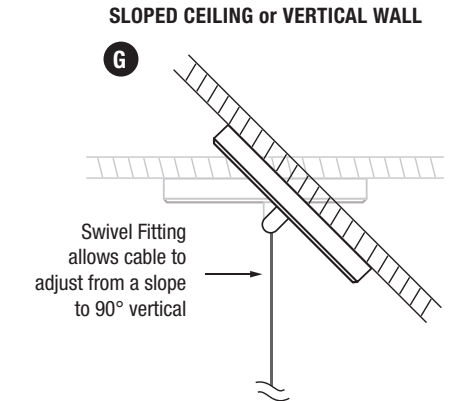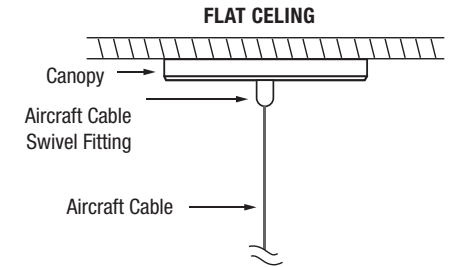

RG-DM-080723