

Date: \_\_\_\_\_

Type: \_\_\_\_\_

Fixture: \_\_\_\_\_

Project: \_\_\_\_\_

Approved: \_\_\_\_\_

# SSC6R14 Six-Inch Round Seamless Indoor Cylinder

## Twin-Conductor Mount Up/Down Lighting with Remote Drivers



### FEATURES

- Up / Down Lighting from 3,000 up to 11,000 Lumens
- Remote Driver with Dual 0-10V Dimming 1% Standard
- 80 Unique Optical Combinations
- Kevlar-Reinforced Twin-Conductor Cable Technology
- Tool-less field interchangeable optics
- No visible seams or fasteners
- Multiple housing colors

### PERFORMANCE

- Beam Spread:** 15°, 25°, 40°, 50°, 72°, 90°
- CCT Options:** 2700K, 3000K, 3500K, 4000K, 5000K
- CRI:** 93 CRI
- Consistency:** 2 SDCM (Luminaire to Luminaire)
- Lumens:** 3000-11000 lumens (nominal)
- Lumen Maintenance:** L70 > 70,000 hours

### PHYSICAL

**Mounting:** Twin-Conductor with canopy for remote driver

**Housing:** No visible seams or fasteners, marine grade, corrosion resistant, solid aluminum extrusion, high pressure die-cast aluminum components.

**Finish:** Six stage chemical iron phosphate conversion pre-treatment. Polyester powder coat finish, 18 µm Min., 3,000 hour salt spray test (ASTM B117) AAMA 2603 specification.

**Warranty:** 5-Year limited warranty

**Lens:** IK05 impact compliant, clear anti-glare tempered glass. The Soft Field Lens option provides diffusion, reduces glare, and enhances visual comfort.

**Ingress Protection:** Dry or damp locations IP43 rated

**Weight:** 8 lbs

**Operating Temperature:** -22°F to 122°F (-30°C to 50°C)

### ELECTRICAL

**Voltage:** Universal 120 - 277 VAC

**Power Supply:** Integral Class II, electronic high-power factor >90, THD < 20%, FCC Title 47 Part 15 Class A.

**Power Consumption:** Maximum 55W per orientation

**Dimming: standard:** 0-10V Dimming, 1%


**Standards:**

- cETLus Listed and RoHS Compliant.
- Tested to UL 1598 and UL 8750 standards / UL-Class I / IES LM-79 / LM-80 / FCC Part 15.

## PHYSICAL DIMENSIONS

Luminaire	Height
SSC6R14-ACR	14" Height

Twin-Conductor Cable Remote Power



Date: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Fixture: \_\_\_\_\_  
 Project: \_\_\_\_\_

Approved: \_\_\_\_\_

# SSC6R14 Six-Inch Round Seamless Indoor Cylinder

## PRODUCT CODE

EXAMPLE: SSC6R14-ACR120-UNV-927-1515L-BKI-D15U25-LD2

MODEL	MOUNTING	SUSP. LENGTH	VOLTAGE	COLOR	LUMENS	FINISH	DOWN OPTICS	UP OPTICS	DIMMING
<b>SSC6R14</b>	<b>ACR-120</b>	<b>UNV</b>							<b>LD2</b>

MODEL	DESCRIPTION
<b>SSC6R14</b>	14" Height

LED DRIVER REMOTE (INDOOR) IP20, IK08, NEMA 1, -20°C to +50°C, 30' MAX Distance with 12AWG (Remote Driver in Canopy)

MOUNTING	DESCRIPTION
<b>ACR</b>	Twin-Conductor Cable, Remote

ACR SUSPENSION LENGTH	DESCRIPTION
<b>120</b>	120" Suspension length (top of luminaire to ceiling, field adjustable)

VOLTAGE	DESCRIPTION
<b>UNV</b>	Universal 120 - 277 VAC

COLOR	DESCRIPTION
<b>927</b>	(93CRI) 2700K
<b>930</b>	(93CRI) 3000K
<b>935</b>	(93CRI) 3500K
<b>940</b>	(93CRI) 4000K
<b>950</b>	(93CRI) 5000K

FINISH	DESCRIPTION
<b>BKI</b>	Black
<b>BRI</b>	Bronze
<b>SLI</b>	Silver
<b>WHI</b>	White
<b>CCI</b>	Custom Color

DOWN LUMENS (nominal)	UP LUMENS
<b>15</b>	1500 lm (Only 93 CRI) <b>15L</b>
<b>20</b>	2000 lm (Only 93 CRI) <b>20L</b>
<b>25</b>	2500 lm (Only 93 CRI) <b>25L</b>
<b>30</b>	3000 lm (Only 93 CRI) <b>30L</b>
<b>35</b>	3500 lm (Only 93 CRI) <b>35L</b>
<b>40</b>	4000 lm (Only 93 CRI) <b>40L</b>
<b>45</b>	4500 lm (Only 93 CRI) <b>45L</b>
<b>50</b>	5000 lm (Only 93 CRI) <b>50L</b>
<b>55</b>	5500 lm (Only 93 CRI) <b>55L</b>

DOWN OPTICS	(nominal)	UP OPTICS
<b>D15</b>	Spot (15°)	<b>N/A</b>
<b>D25</b>	Narrow Flood (25°)	<b>U25</b>
<b>D40</b>	Mid Flood (40°)	<b>N/A</b>
<b>D50</b>	Flood (50°)	<b>U50</b>
<b>D72</b>	Wide Flood (72°)	<b>U72</b>
<b>N/A</b>	Very Wide Flood (90°)	<b>U90</b>

WITH SOFT FIELD LENS		
<b>D15S</b>	Spot (15°)	<b>N/A</b>
<b>D25S</b>	Narrow Flood (25°)	<b>U25S</b>
<b>D40S</b>	Mid Flood (40°)	<b>N/A</b>
<b>D50S</b>	Flood (50°)	<b>U50S</b>
<b>D72S</b>	Wide Flood (72°)	<b>U72S</b>
<b>N/A</b>	Very Wide Flood (90°)	<b>U90S</b>

DIMMING (MANDATORY)	
<b>LD2</b>	0-10V Dimming, 1% (Qty. 2) (2 Separate Circuits: Individual Control of Power and Dimming for Up/Down Lighting)

\*All drivers listed above are remote in canopy.

# SSC6R14 Six-Inch Round Seamless Indoor Cylinder

## LUMENS / WATTAGE nominal

Model
-------

SSC6R14 (4K)






LUMENS	WATTS
15L	16
20L	20
25L	25
30L	29
35L	34
40L	39
45L	44
50L	50
55L	55

CCT MULTIPLIER	
27K	0.89
30K	0.95
35K	0.99
40K	1.00
50K	1.01

Note: 83CRI  $\leq$  1.18  
Consult factory.

0-10V Approved Dimmer List	
Manufacturer	Manufacturer Part Number
Lutron	Dival DVSTV-XX
	Dival DVSTV-453PH-WH1
Leviton	illumatech 010-IP710-DLZ





## PHOTOMETRICS - DOWN LIGHT

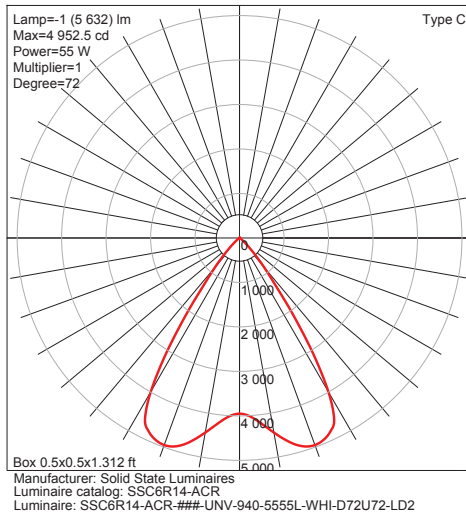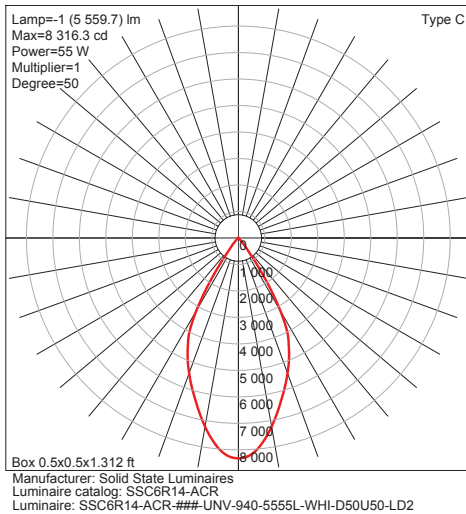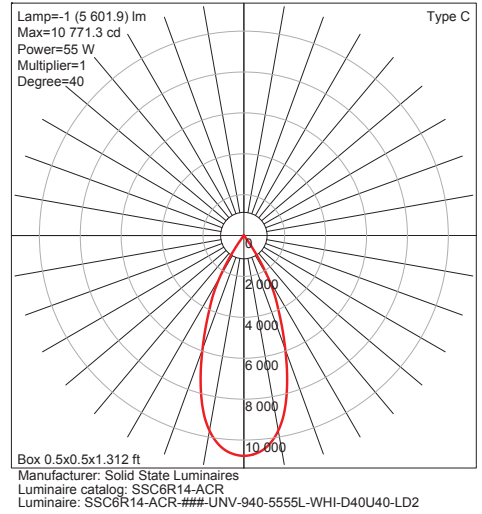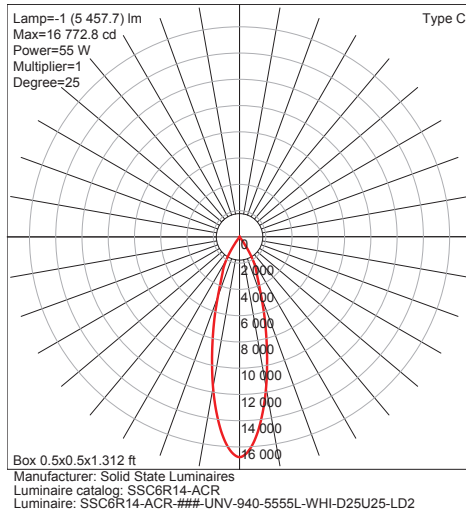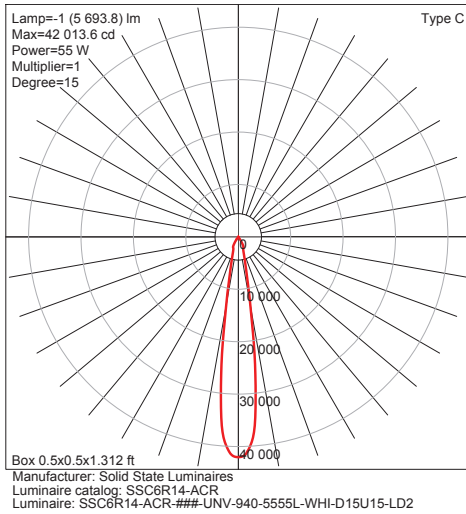

Due to continuous development and improvements, specifications are subject to change without notice.  
Product use certifies agreement to Solid State Luminaires terms and conditions.

# SSC6R14 Six-Inch Round Seamless Indoor Cylinder

## PHOTOMETRICS - UPLIGHT

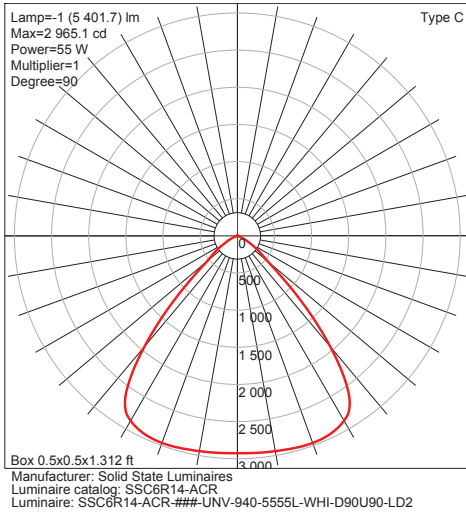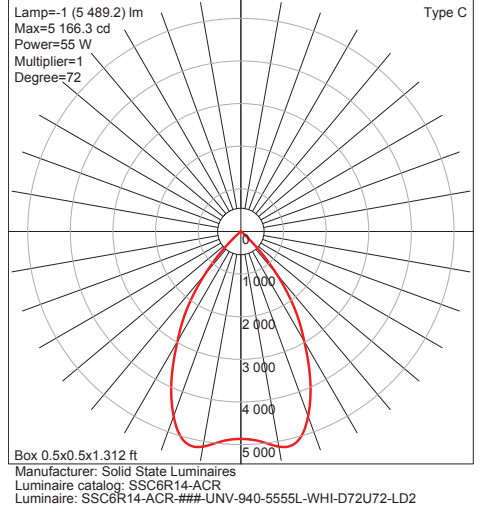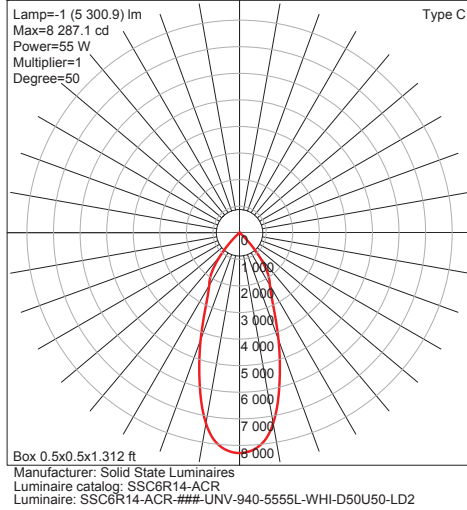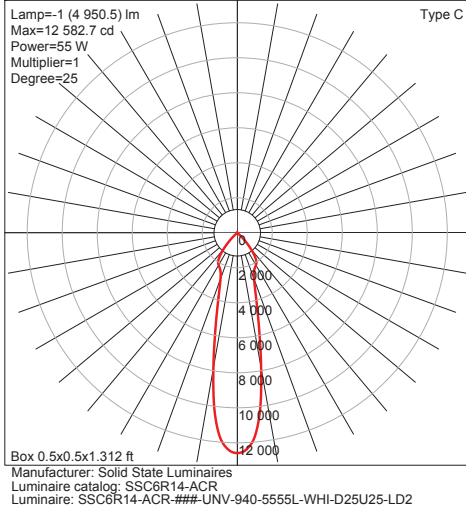

Due to continuous development and improvements, specifications are subject to change without notice.  
Product use certifies agreement to Solid State Luminaires terms and conditions.