

Date: _____
 Type: _____
 Fixture: _____
 Project: _____

Approved: _____

SSC8GA without Battery Backup

8" Round indoor cylinders with adjustable gimbals



FEATURES

- Up to 3500 lm / 34W
- No visible seams or fasteners
- Tool-less field interchangeable optics
- Quick twist-lock mounting
- Adjustable gimbal
- 1.5G Vibration Tested
- 93 CRI with 2 SDCM

PERFORMANCE

Beam Spread: 15° | 25° | 60°
CCT Options: 2700K, 3000K, 3500K, 4000K
CRI: 93 CRI
Consistency: 2 SDCM (Fixture to Fixture)
Lumens: 2000-3500 lm
Lifetime: > 70,000 hours / L70 or better


PHYSICAL

Mounting: Slope pendant and surface mounts with twist-lock canopy, and wall mount.
Ingress Protection: Dry or damp locations IP43 rated
Finish: Six stage chemical iron phosphate conversion pre-treatment. Polyester powder coat finish, 18 µm Min., 3000hr salt spray test (ASTM B117) AAMA 2603 specification.
Warranty: 5-Year limited warranty (refer to website for details)
Housing: Marine grade, corrosion resistant, solid aluminum extrusion, high pressure die-cast aluminum components, black baffle.
Lens: IK05 impact compliant, clear anti-glare tempered glass
Vibration Resistance: Compliant with 1.5G ANSI C136.31, Seismic rated AC-156
Weight: 8-12 lbs (Depending on Length)
Operating Temperature: -22°F to 122°F (-30°C to 50°C)

ELECTRICAL

Voltage: Universal 120-277V AC standard, 347V optional
Power Supply: Integral Class II, electronic high-power factor >.90, THD < 20%, FCC Title 47 Part 15 Class A. EldoLED & Lutron optional.
Power Consumption: Up to 2000 lm @ 18W
Dimming: LED dimming: standard Tri-Dim includes 0-10V, 1%, TRIAC and ELV
Certification: CEC Title 24 - JA8 Compliant (93 CRI Only)
Standards: cETLus Listed, CE, NOM, and RoHS Compliant.

PHYSICAL DIMENSIONS

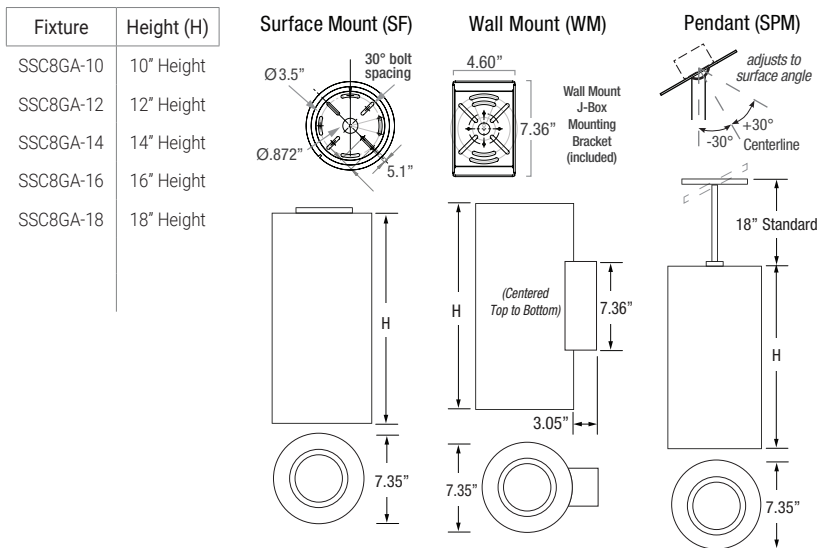

Due to continuous development and improvements, specifications are subject to change without notice. Solid State Luminaires reserves the right to change lab test details or specifications without notice. Product use certifies agreement to Solid State Luminaires terms and conditions. **All stated specifications have a tolerance of +/- 7%.

Date: _____
 Type: _____
 Fixture: _____
 Project: _____

Approved: _____

SSC8GA without Battery Backup

PRODUCT CODE

EXAMPLE: SSC8GA-10-SPM18-UNV-930-10L-BKI-15-TD

MODEL	HEIGHT	MOUNTING	SUSP. LENGTH	VOLTAGE	COLOR	LUMENS	FINISH	OPTIC	DIMMING	OPTIONS	BATTERY
SSC8GA											

<p>MODEL</p> <p>SSC8GA</p> <p>HEIGHT</p> <p>10 10" Height</p> <p>12 12" Height</p> <p>14 14" Height</p> <p>16 16" Height</p> <p>18 18" Height</p> <p>MOUNTING</p> <p>SF Surface Mount</p> <p>WM Wall Mount</p> <p>SPM Pendant Mount</p> <p>SPM LENGTH</p> <p>Specify the optional suspension length in inches. (Top of fixture to ceiling) (SPM 18" Standard, 4"-120" Max; 61"-120" w/LD & ET Only and stem comes in 2 sections) *Consult factory & price guide for other lengths.</p> <p>VOLTAGE</p> <p>UNV Universal 120-277 Volt AC</p> <p>347V 347 Volt AC</p>	<p>COLOR</p> <p>927 (93CRI) 2700K</p> <p>930 (93CRI) 3000K</p> <p>935 (93CRI) 3500K</p> <p>940 (93CRI) 4000K</p> <p>LUMENS nominal</p> <p>20L 2000 lm @ 18 W</p> <p>25L 2500 lm @ 23 W</p> <p>30L 3000 lm @ 27 W</p> <p>35L 3500 lm @ 34 W</p> <p>FINISH</p> <p>BKI Black (AAMA 2603)</p> <p>BRI Bronze (AAMA 2603)</p> <p>SLI Silver (AAMA 2603)</p> <p>WHI White (AAMA 2603)</p> <p>CCI Custom Color (AAMA 2603)</p>	<p>OPTIC nominal</p> <p>15 15° Spot</p> <p>25 25° Mid Spot</p> <p>60 60° Flood</p> <p>DIMMING</p> <p>TD Tri-Dim (0-10V 1%, TRIAC & ELV)</p> <p>LD347 0-10V 1% (347V Only)</p> <p>OPTIONS</p> <p>HC Honeycomb Louver</p> <p>BATTERY</p> <p>N/A (Leave blank)</p>									
								<p>w/SOFT FIELD</p> <p>N/A (Leave Blank)</p>			

ACCESSORIES (Order separately.)

SSC8GA without Battery Backup

LUMENS

Model	Watts	940
SSC8GA	18 W	2000 lm
	23 W	2500 lm
	27 W	3000 lm
	34 W	3500 lm

IES Multiplier	
Color	Multiplier
927	0.93
930	0.97
935	0.99
940	1.00

*83CRI@1.15 Consult factory.

TRIAC & ELV Approved Dimmer List	
Manufacturer	Manufacturer Part Number
Lutron	Glyder GLV-600
	Diva DVLV-600P
	Diva DV-600P
	Diva DVELV-600P(303)
	Maestro MALV-600
	Nova T NT-1000
	Nova T NTELV-600
Leviton	Skylark SLV-600P
	RadioRA2-10ND
	SureSlide 6633
	Illuminatech IPE04

0-10V Approved Dimmer List	
Manufacturer	Manufacturer Part Number
Lutron	Diva DVSTV-XX
	Diva DVSTV-453PH-WH1
Leviton	Illuminatech 010-IP710-DLZ

PHOTOMETRICS

