solid state luminaires

# Lazer Pin
## Narrow Beam Projector



World Class
**Precision Elliptical Beam**

Best in Class
**Micro Profile**

Ultra Tight
**Beam of Light**






5.1° x 16.2°
Laser-Like Beam

Compact 3" x 4.5"
Form Factor


Dramatic, Tightly
Controlled Beam



# Lazer Pin
## Narrow Beam Projector

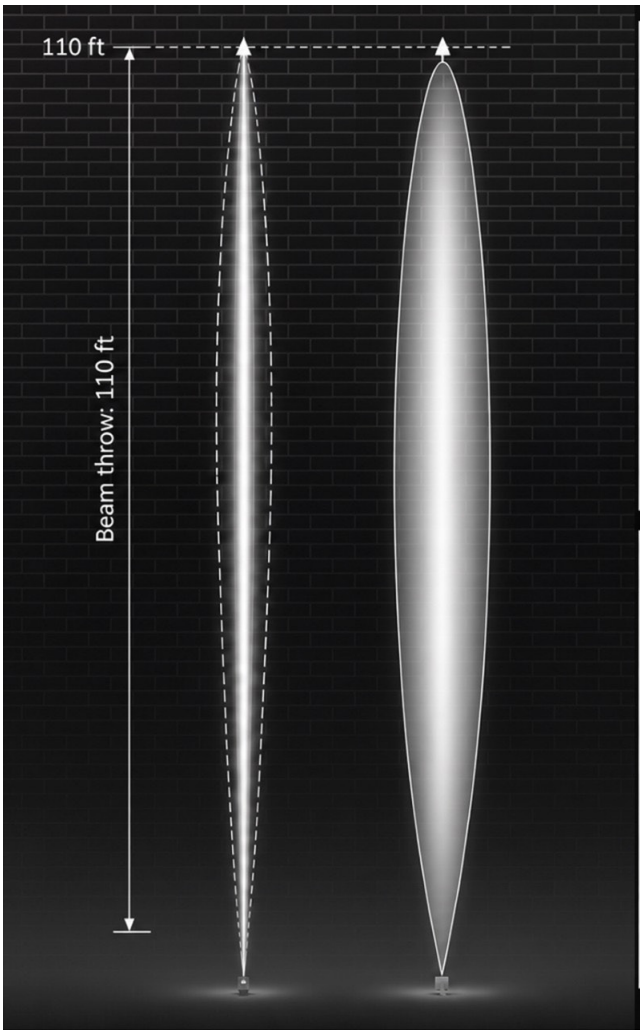


### Isofootcandle Plot

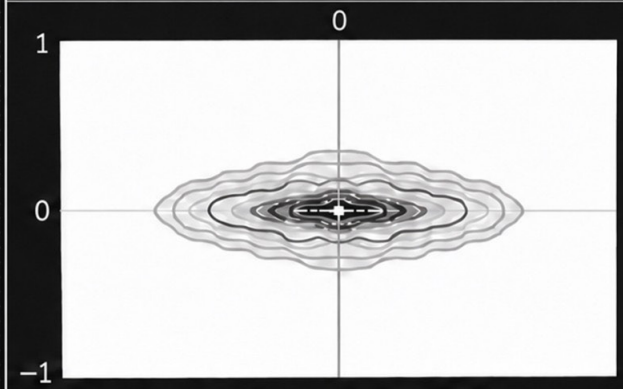


**Total LU: 0.8**

12,010 Max Cd


Distance in units of mount height (25ft)

### Illuminance at a Distance


| | Center Beam fc | Beam Width | |
|---|---|---|---|
| 18.3ft | 35.9 fc | 1.6 ft | 6.8 ft |
| 36.7ft | 8.92 fc | 3.3 ft | 13.6 ft |
| 55.0ft | 3.97 fc | 4.9 ft | 20.4 ft |
| 73.3ft | 2.24 fc | 6.6 ft | 27.2 ft |
| 91.7ft | 1.43 fc | 8.2 ft | 34.0 ft |
| 110.0ft | 0.99 fc | 9.8 ft | 40.8 ft |

Vert. Spread: 5.1° Horiz. Spread: 21.0°

## OPTICAL DISTRIBUTION

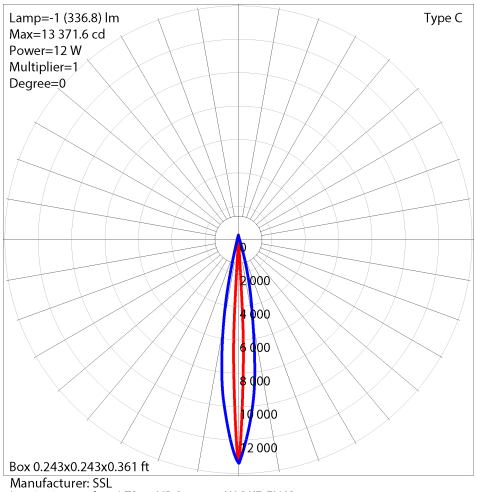


Manufacturer: SSL
Luminaire catalog: LZP-24VDC-930-08W-BKE-ENSP
Luminaire: LZP-24VDC-930-08W-BKE-ENSP

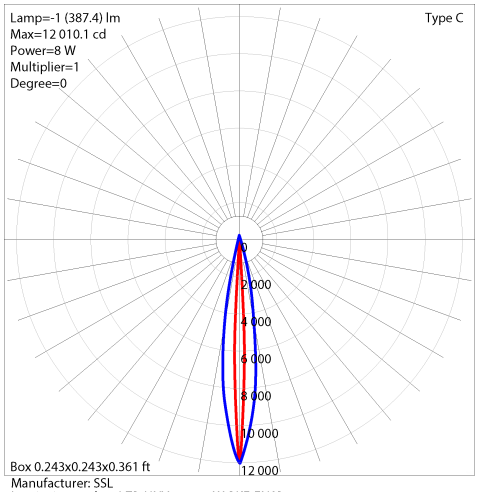


Manufacturer: SSL
Luminaire catalog: LZP-UNV-940-12W-BKE-ENSP
Luminaire: LZP-UNV-940-12W-BKE-ENSP

Intertek